

## **puren M separation layer TOP DSB 100** **on timber or plywood decking with self-adhesive strips**

### Description


**puren M TOP DSB 100** is one of our top-quality accessories.  
The formwork membrane has a great tearing resistance because of its textile reinforcement. The self-adhesive strips allow a fast lying and save time and money.

In the system **puren M TOP DSB 100** has to be laid directly on the **timber or plywood decking** (fixed with wide staples) to separate the decking and the puren M vapour barrier DS AL.

Please consider the codes regarding the overlaps.

### Technical characteristics

• Dimension	50 m x 1,50 m (= 75 sqm per roll)	
• Weight	approx. 15 kg per roll	
• Maximum tensile force	400 N/5 cm	DIN 53354
• Maximum tensile force/elongation	10,2 %	DIN 53354
• Tearing resistance	200 N	DIN 53354
• Nail tearing resistance	> 250 N	DIN 54301
• Fire classification	B2	DIN 4102
• Resistance against water pressure	> 250 hPa	DIN 53886
• Air permeability	air-tight	DIN 53887
• Stability against UV radiation	minimum 3 months	
• sd-value	≥ 100 m	DIN 52615

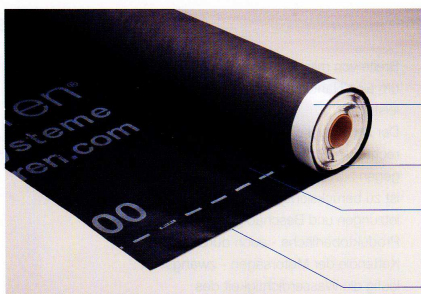

- \_\_\_\_\_ overlap 80 mm, alongside self-adhesive
- \_\_\_\_\_ fleece covering underside
- \_\_\_\_\_ textile reinforcement for great tearing resistance
- \_\_\_\_\_ alu-inlay, sd-value ≥ 100 m

The information provided in this paper does not release the buyer from his obligation to check the materials used for the suitability for the intended purpose or application.  
Our informational material is meant to provide advice to the best of our knowledge; the contents, however, are not legally binding.  
We reserve the right to make technical changes.  
We refer to our general terms & conditions of sale and supply.